
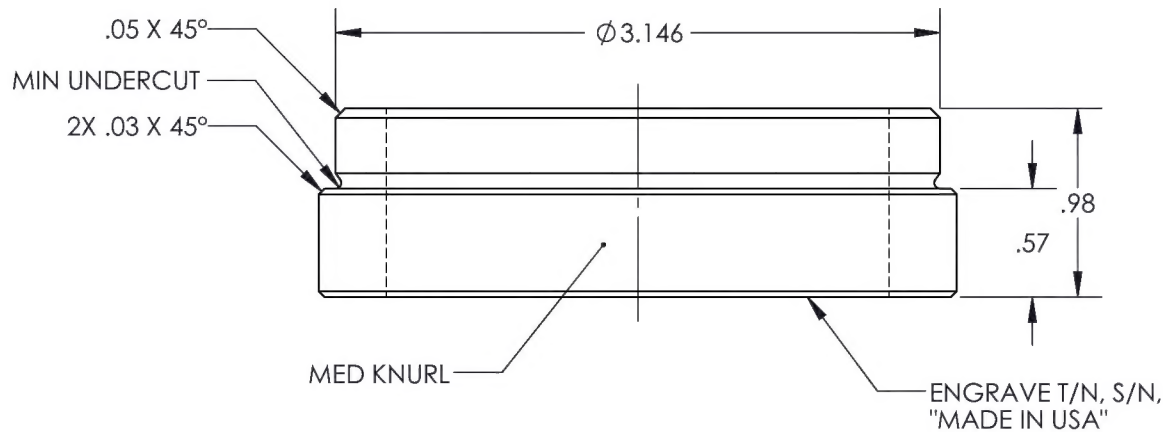



This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	10/4/2016	DPD	JAG

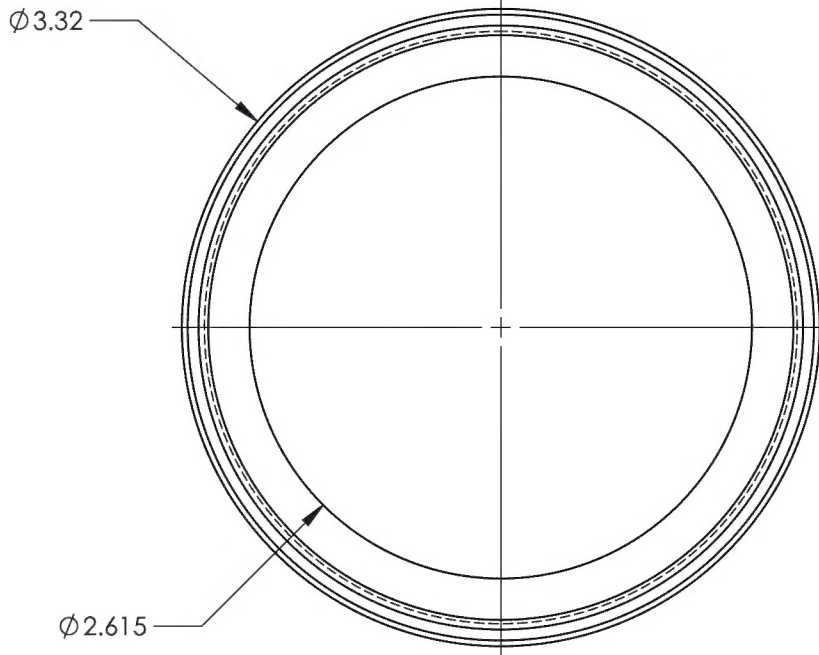

NOTE:
REF. AIRBUS T/N: 1X56-136-428.

DART AEROSPACE																									
TITLE MOUNTING RING																									
DWG NO. RBE1X56-136-428	REV 1																								
<table border="1"> <tr> <td>MAT'L 4140/4142</td> <td>UNLESS OTHERWISE SPECIFIED</td> </tr> <tr> <td>HEAT TREAT RC 45-50</td> <td>DIMENSIONS ARE IN INCHES</td> </tr> <tr> <td>FINISH BLACK OXIDE</td> <td>.XXX ± .005 FRACTIONS ± 1/8</td> </tr> <tr> <td>SPEC QMSI-6.2.2, B.O. REV D</td> <td>.XX ± .01 ANGLES ± 5°</td> </tr> <tr> <td>DRAWN BY: DUERFELDT</td> <td>.X ± .1 SURFACES = 125</td> </tr> <tr> <td>CHECKED: CLOUGH</td> <td>1. BREAK ALL SHARP EDGES</td> </tr> <tr> <td>OPPS APPR: ANDERSON</td> <td>.015 x 45° OR .015R</td> </tr> <tr> <td>QA APPR: LINDSAY</td> <td>2. DIMENSIONAL LIMITS APPLY</td> </tr> <tr> <td>APPROVED: GILBERT</td> <td>AFTER PLATING</td> </tr> <tr> <td>SCALE 1:1</td> <td>3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009</td> </tr> <tr> <td>DATE 8/10/2016</td> <td>USED ON MODEL</td> </tr> <tr> <td>SHEET 1 OF 1</td> <td>H145</td> </tr> </table>		MAT'L 4140/4142	UNLESS OTHERWISE SPECIFIED	HEAT TREAT RC 45-50	DIMENSIONS ARE IN INCHES	FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8	SPEC QMSI-6.2.2, B.O. REV D	.XX ± .01 ANGLES ± 5°	DRAWN BY: DUERFELDT	.X ± .1 SURFACES = 125	CHECKED: CLOUGH	1. BREAK ALL SHARP EDGES	OPPS APPR: ANDERSON	.015 x 45° OR .015R	QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY	APPROVED: GILBERT	AFTER PLATING	SCALE 1:1	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	DATE 8/10/2016	USED ON MODEL	SHEET 1 OF 1	H145
MAT'L 4140/4142	UNLESS OTHERWISE SPECIFIED																								
HEAT TREAT RC 45-50	DIMENSIONS ARE IN INCHES																								
FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8																								
SPEC QMSI-6.2.2, B.O. REV D	.XX ± .01 ANGLES ± 5°																								
DRAWN BY: DUERFELDT	.X ± .1 SURFACES = 125																								
CHECKED: CLOUGH	1. BREAK ALL SHARP EDGES																								
OPPS APPR: ANDERSON	.015 x 45° OR .015R																								
QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY																								
APPROVED: GILBERT	AFTER PLATING																								
SCALE 1:1	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009																								
DATE 8/10/2016	USED ON MODEL																								
SHEET 1 OF 1	H145																								

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
				1	MOUNTING RING	4140/4142	